


Laminated or insulated glass in an aluminium frame.
Doors available in single-leaf or double-leaf configurations.
High acoustic insulation performance – R_w up to 44 dB.
Drop-down seal integrated with the door leaf.
Frame profiles, hinges, and handle available in any RAL colour.
Optional equipment:

- Access control system
- Concealed hinges
- Concealed or surface-mounted door closers
- Lumi Smart Glass PDLC Film

Doors compatible with ESPES glass partition wall systems and Mural door frame.

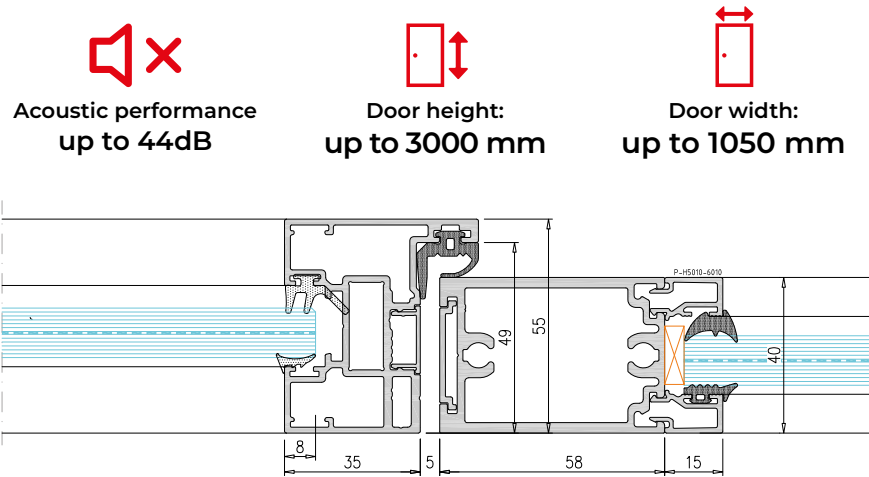

Sound insulation			
GLASS	R_w (dB)	C (dB)	R_{a1} (dB)
VSG 66.2	36	-1	35
VSG 66.2	37	-1	36
VSG 88.2	38	-1	37
VSG 44.2 Si/ 15 / 6 ESG	39	-1	38
VSG 44.2 /12 /55.2	40	-1	39
VSG 44.2i / 12 /55.2	44	-2	42

certified by:



WE CREATE SPACE