

Door leaf made entirely of tempered glass
Available as hinged or sliding doors
High acoustic insulation performance R_w up to 38 dB

Optional equipment:

- decorative muntins
- access control
- surface-mounted door closer
- Lumi smart film with variable transparency
- drop-down seal in the door leaf

Doors compatible with ESPES glass wall systems and Mural frames




Acoustic performance
up to 38dB



Door height
up to 2700 mm



Door width
up to 1050 mm

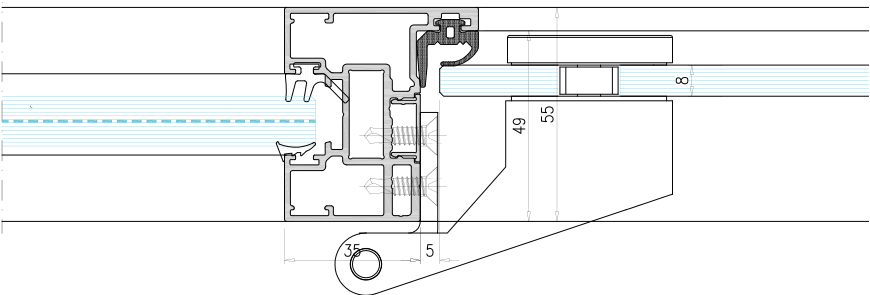

Acoustic insulation

GLASS	R_w (dB)	C (dB)	R_{a1} (dB)
8 ESG	24	-1	23
8 ESG + drop-down seal	32	-2	30
55.2 VSG ESG + drop-down seal	38	-1	37

WE CREATE SPACE

certified by:



ALUMINIUM FRAME DOOR HR

Laminated or insulated glass in an aluminium frame.

Doors available in single-leaf or double-leaf configurations.

High acoustic insulation performance – R_w up to 44 dB.

Drop-down seal integrated with the door leaf.

Frame profiles, hinges, and handle available in any RAL colour.

Optional equipment:

- Access control system
- Concealed hinges
- Concealed or surface-mounted door closers
- Lumi Smart Glass PDLC Film

Doors compatible with ESPES glass partition wall systems and Mural door frame.




Acoustic performance
up to 44dB



Door height:
up to 3000 mm



Door width:
up to 1050 mm

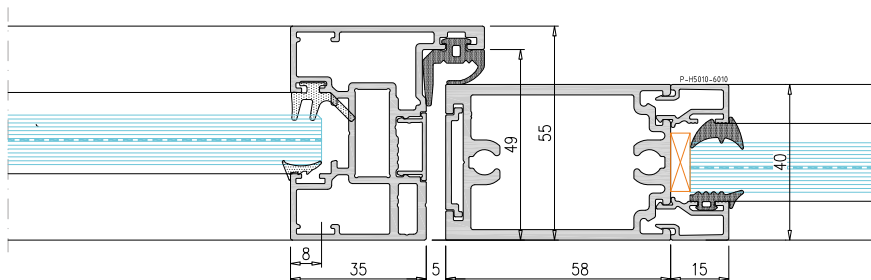

Sound insulation

GLASS	R_w (dB)	C (dB)	R_{a1} (dB)
VSG 66.2	36	-1	35
VSG 66.2	37	-1	36
VSG 88.2	38	-1	37
VSG 44.2 Si/ 15 / 6 ESG	39	-1	38
VSG 44.2 /12 /55.2	40	-1	39
VSG 44.2i / 12 /55.2	44	-2	42

certified by:



WE CREATE SPACE